


The CS Cavity Slider™ is a practical solution for those areas where there is not enough space for a swinging door. In addition to its space saving attributes in restrooms, hallways and laundries, it can be used with confidence for architectural feature openings around your project.

- Structurally robust due to its construction from aluminum extrusions
- Easy to assemble and install
- Pocket frame accommodates 1-3/8" and 1-3/4" doors up to 4'0" x 8'0"
- Can be cut down to size on site
- Suitable for residential and commercial projects
(meets Type 1 construction code without any combustible materials)

Rough Opening

DH = Door Height DW = Door Width

Dimension	Inches
RO Height	DH + 4-1/4"
RO Width Single	(DW x 2) + 2"
RO Width Bi-Parting	(DW x 4) + 2"

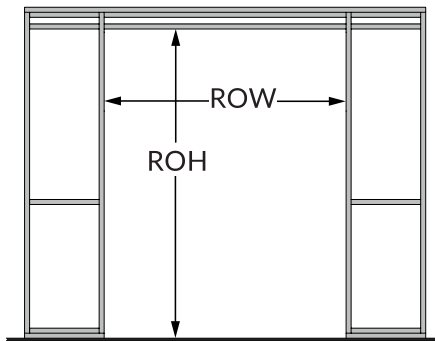

How to Order

1. Choose Size

Frames can be cut down on site so maximize size for each model:

Model	Max Door Size
CSPDF2480	2/0 x 6/8
CSPDF2880	2/4 x 6/8
CSPDF3080	2/6 x 6/8
CSPDF3280	2/8 x 6/8
CSPDF3480	2/10 x 6/8
CSPDF3680	3/0 x 6/8
CSPDF2496	2/0 x 8/0
CSPDF2896	2/4 x 8/0
CSPDF3096	2/6 x 8/0
CSPDF3296	2/8 x 8/0
CSPDF3496	2/10 x 8/0
CSPDF3696	3/0 x 8/0
CSPDF4896	4/0 x 8/0

2. Choose a Carriage Pack (one per door)

Includes: Carriages, mounting plates, T-Guide, fixing screws and adjusting wrench

Standard	M6 (200 lb)
	M8 (500 lb)

SofStop® Single Soft Close	Minimum Door Width	
	Single	Bi-parting
0-176 lb	25"	28"
176-264 lb	28"	31"

SofStop® Twin	Minimum Door Width	
	Single	Bi-parting
0-176 lb	33"	36"






Smooth running carriages with encased ball bearings. Up to 500lb (240kg) capacity

SofStop®
Soft Close/Soft Open also available



Corner joining brackets ensure precise right angled assembly



Extruded aluminum track incorporated into head unit

Split jambs & slats use hollow core technology for superior rigidity

Door thickness 1-3/8" or 1-3/4" (35 or 44.5mm)

Strong aluminum frame complies with Type 1 Construction

Horizontal slats for added strength

Compatible with 3-1/2" & 3-5/8" wood or steel stud




T-joining brackets for easy assembly of slats to split jambs & back stud



Trim clips for quick & easy trim fitting

Bottom plate assembly



Adjustable T-Guide

Patent Pending



Cycle Tested 1 Million Openings



ADA Compliant



Available with SofStop®



Single or Bi-Parting Units



Maximum Door Weight



Easy Assembly