




DOG HOUSE KIT

INSTALLATION GUIDE




READ ALL INSTRUCTIONS AND REVIEW DIAGRAMS BEFORE BEGINNING THE INSTALLATION TO GET A THOROUGH UNDERSTANDING OF THE PROCESS.




KIT INCLUDES


FRONT & BACK PANELS (2x)

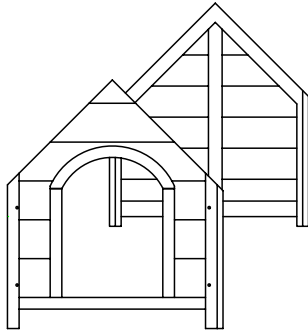


ROOF PANELS (2x)

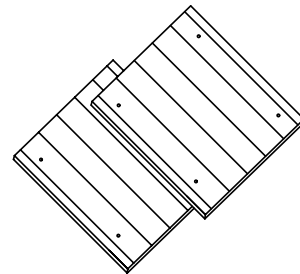


FLOOR PANELS (2x)

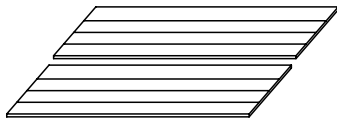


SIDE PANELS (2x)




ROOF RIDGE (1x)



A 2-1/2" BOLT & HEX NUT (8x)




B 1-1/4" WOOD SCREW (14x)



NOTE: in order to protect the wood on your dog house, it is recommended to apply a protective stain finish or clear coat at least once a year.


Step 1

Connect the front and back panel to each side using the 2 1/2" lag bolts and hex nuts (A).

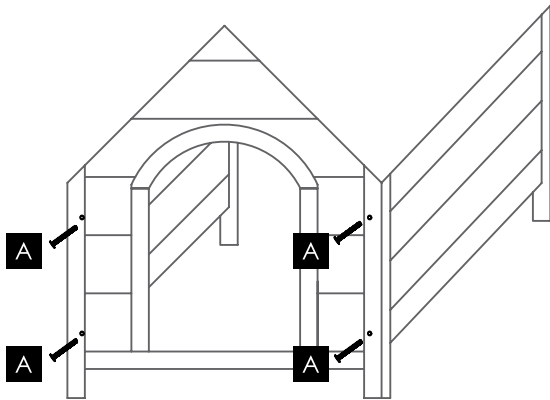

Step 2


Insert the two floor panels into the dog house.

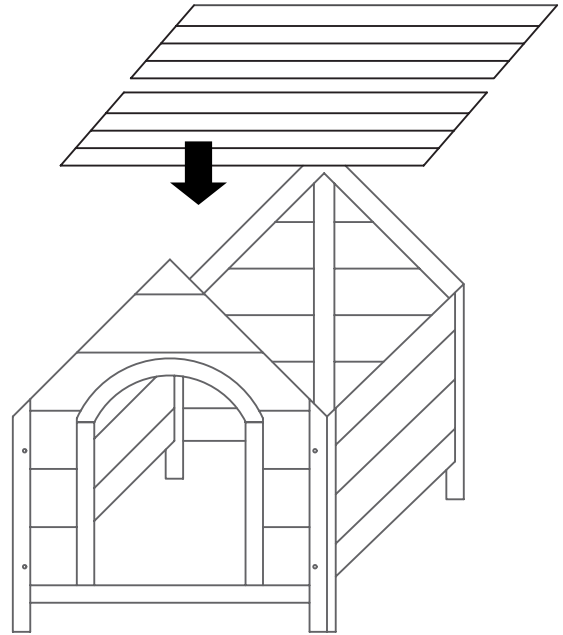

OPTIONAL: use wood glue to permanently fasten (not included)

Step 3

Attach the roof to the top of the front and back panels using the supplied 1 1/4" wood screws (B). Repeat the process for the other roof panel using the remaining screws.

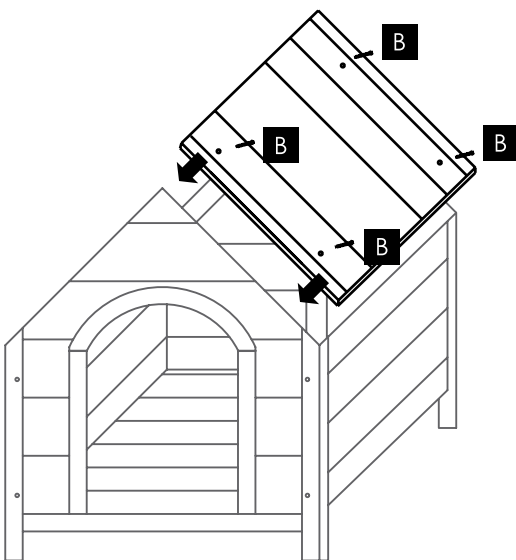

NOTE: there is a short wood cleat that will rest on the two side panels to allow you to position the panels.

Step 4

Attach the roof ridge to the roof panels using the supplied 1 1/4" wood screws (B).

